
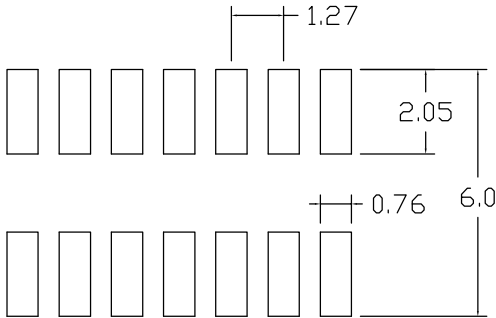

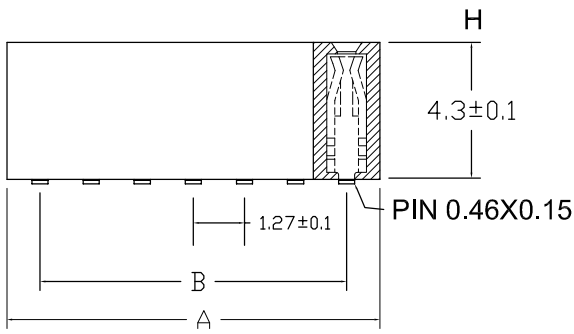


ÓÉ Foxit PDF Editor ±â¼-
PæÈÛÜÖÐ (c) by Foxit Software Company, 2004
½00ÁÖÜ/EA¹Ä½

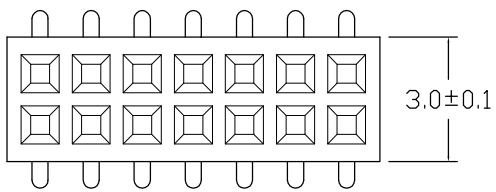

PCB LAYOUT

SPECIFICATIONS

Material:
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass
Plating:1u"Au
Electrical Charactristics:
Contact Resistance:20mΩ Max.
Insulator Resistance:1000MΩ Min.
Withstanding Voltage:AC 500V
Currernt Rating:1 AMP
Operating Temperature:-40℃ to +105℃

Position Dimension	2 Thru 50
A± 0.30	1.27 * No. of Positions+0.40
B± 0.20	1.27 * No. of Contacts-1.27
H	2.0/3.4/4.3

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-21	深圳百富特电子有限公司	
主体	PA6T					
端子	黄铜镀金					
公差	>10 ±0.30	制图	审查	核准	品名	1.27*4.3双排母座 2*NP SMT
分段	<10 ±0.20					
	<3 ±0.10					
视角		刘建			料号	