
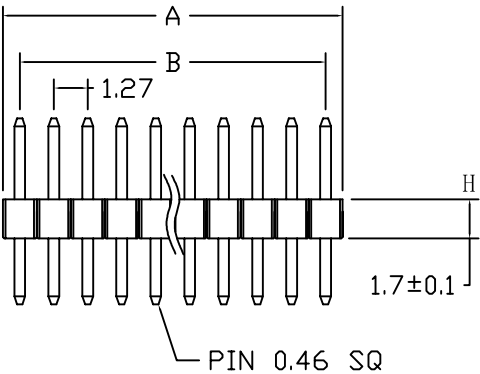



PCB LAYOUT

SPECIFICATIONS

Material:
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass
Plating:Au or Sn over 50u’’ Ni
Electrical Charactristics:
Contact Resistance:20mΩ Max.
Insulator Resistance:1000MΩ Min.
Withstanding Voltage:AC 500V
Currernt Rating:1 AMP
Operating Temperature:-40℃ to +105℃



Position Dimension	1 Thru 40
A± 0.30	1.27 * No. of Positions
B± 0.20	1.27 * No. of Contacts-1.27
H	1.0/1.7/2.0/2.5

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市百富特电子 有限公司	
主体	PA6T					
端子	黄铜镀金					
公差	>10 ±0.20	制图	审查	核准	品名	1.27*1.7mm单排直针1*NP
分段	<10 ±0.15					
	<3 ±0.05					
视角					料号	