

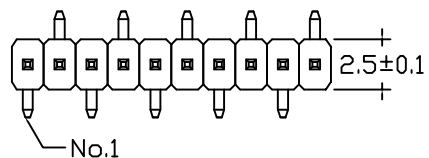
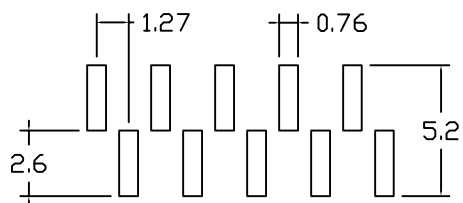



PYPE 1



PYPE 2

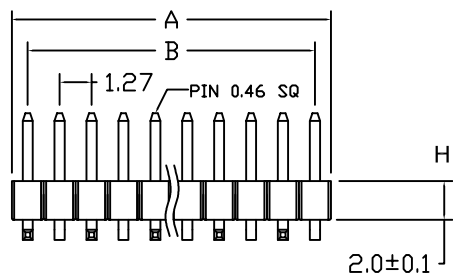

PYPE 1

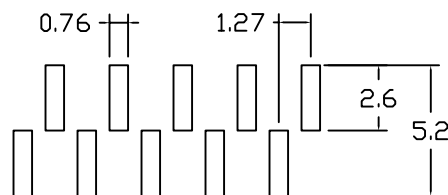

PYPE 2

PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PA6T (UL94V-0),Black

Contacts:Brass

Plating:Au or Sn over 50u'' Ni

Electrical Characteristics:

Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Currrent Rating:3 AMP

Operating Temperature:-40℃ to +105℃

Position Dimension	1 Thru 50
A± 0.30	1.27 * No. of Positions-0.3
B± 0.20	1.27 * No. of Contacts-1.27
H	1.0/1.5/1.6/1.7/2.0/2.54

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市百富特电子 有限公司	
主体	PA6T					
端子	黄铜镀锡					
公差	>10 ±0.20	制图	审查	核准	品名	1.27*2.0mm 1*NP SMT
分段	<10 ±0.15 <3 ±0.02					
视角		刘建			料号	