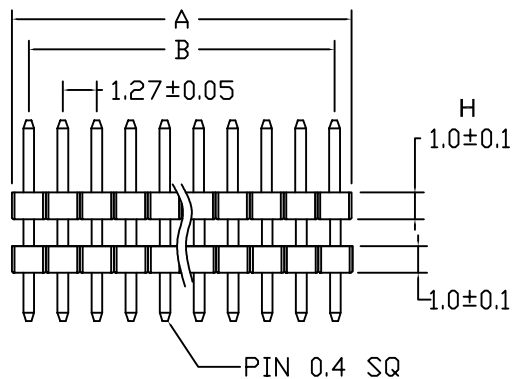



PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PA6T (UL94V-0),Black

Contacts:Brass

Plating:Au or Sn over 50u'' Ni

Electrical Characteristics:

Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Currernt Rating:1 AMP

Operating Temperature:-40℃ to +105℃

Position Dimension	1 Thru 40
A± 0.30	1.27 * No. of Positions
B± 0.20	1.27 * No. of Contacts-1.27
H	1.0/1.7/2.0/2.5

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市百富特电子 有限公司	
主体	PA6T					
端子	黄铜镀金	制图 刘建	审查	核准	品名	1.27*1.0mm单排双塑1*NP
公差	>10 ±0.30					
分段	<10 ±0.20					
	<3 ±0.10					
视角					料号	