

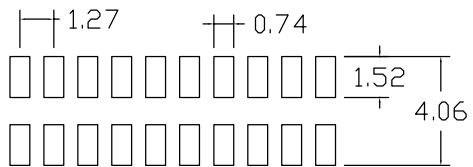
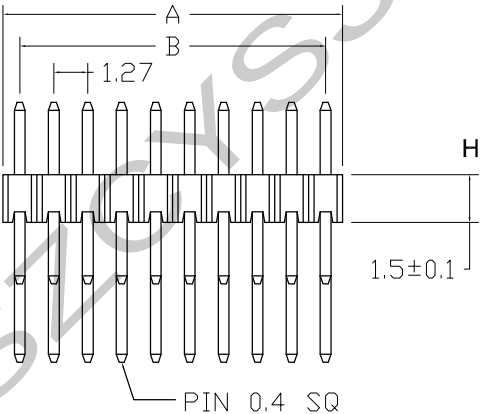


SPECIFICATIONS

Material:
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass
Plating:Au or Sn over 50u'' Ni
Electrical Charactristics:
Contact Resistance:20mΩ Max.
Insulator Resistance:1000MΩ Min.
Withstanding Voltage:AC 500V
Currernt Rating:1 AMP
Operating Temperature:-40℃ to +105℃



PCB LAYOUT

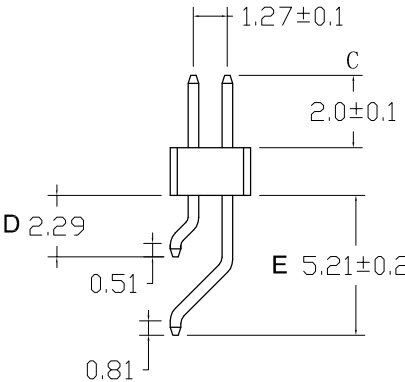

Position Dimension	1 Thru 50
A± 0.30	1.27 * No. of Positions
B± 0.20	1.27 * No. of Contacts-1.27
H	1.0/1.5/1.6/1.7/2.0/2.54

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市超越世纪 电子有限公司	
主体	PA6T					
端子	黄铜镀金					
公差 分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	1.27*1.5 双排针 2XnP 侧 SMT
视角		刘建			料号	