

SPECIFICATIONS

Material:

Insulator:Glass filled PA6T (UL94V-0),Black

Contacts:Brass

Plating:Au or Sn over 50u'' Ni

Electrical Characteristics:





Contact Resistance:20m Ω Max.

Insulator Resistance:1000M Ω Min.

Withstanding Voltage:AC 500V

Currrent Rating:1 AMP

Operating Temperature:-40℃ to +105℃

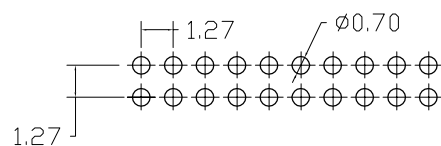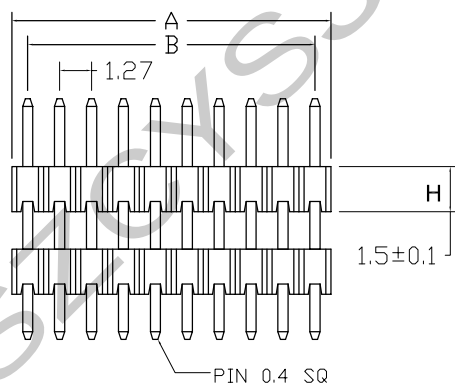

PCB LAYOUT

Position Dimension	1 Thru 50
A± 0.30	1.27 * No. of Positions
B± 0.20	1.27 * No. of Contacts-1.27
H	1.0/1.5/1.6/1.7/2.0/2.54

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-04-12	深圳市超越世纪 电子有限公司	
主体	PA6T					
端子	黄铜镀金					
公差 分段	>10 ±0.20 <10 ±0.15 <3 ±0.02	制图	审查	核准	品名	1.27*1.5mm双排针 双塑2*nP
视角		刘建			料号	