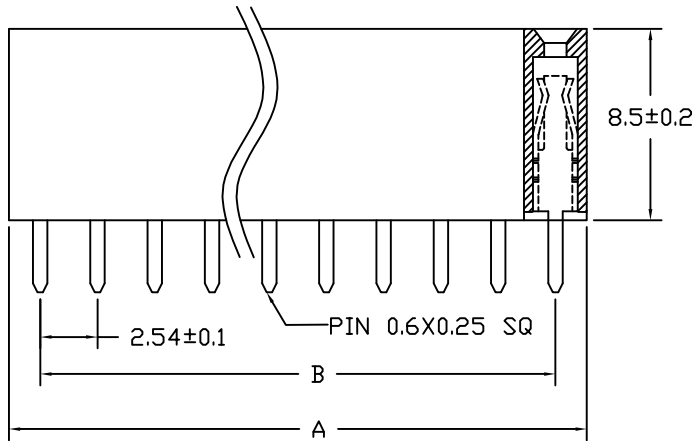



PCB LAYOUT

SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0), Black
Contacts: Brass
Contact Plating: Au or Sn over 50 u'' Ni
Plating: 1u'' Au

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
Insulator Resistance: 1000MΩ Min.
Withstanding Voltage: AC 1000V
Current Rating: 3 AMP
Operating Temperature: -40°C to +105°C

Position Dimension	2 thru 40
A± 0.30	2.54 * No. of Positions+0.4
B± 0.25	2.54 * No. of Contacts-2.54

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-09	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金					
公差分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	2.54(H8.5)1*NP 双排母 180度
视角		刘建			料号	