
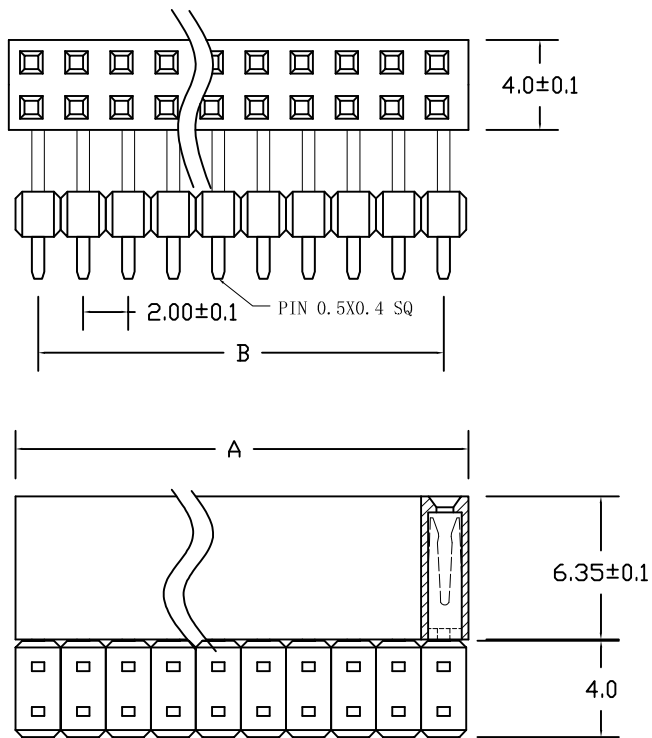


SPECIFICATIONS

Material:
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass
Plating:Au or Sn over 50u'' Ni
Electrical Charactristics:
Contact Resistance:20mΩ Max.
Insulator Resistance:1000MΩ Min.
Withstanding Voltage:AC 500V
Currrent Rating:1.5 AMP
Operating Temperature:-40℃ to +105℃

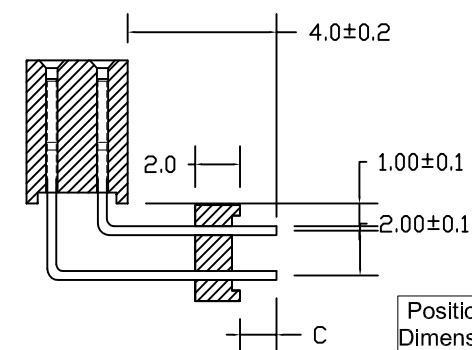

Position Dimension	2 Thru 40
A± 0.30	2.00 * No. of Positions+0.40
B± 0.20	2.00 * No. of Contacts-2.00

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-4-26	深圳市百富特电子 有限公司						
主体	PA6T										
端子	黄铜镀金										
公差 分段	>10 ±0.3 <10 ±0.2 <3 ±0.1	制图	审查	核准	品名	2.0*6.35 双排母座 2*NP 加芯					
视角							刘建			料号	