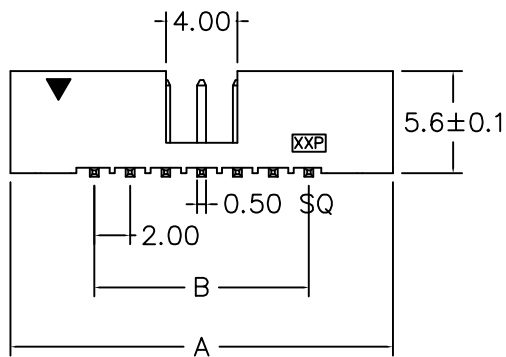
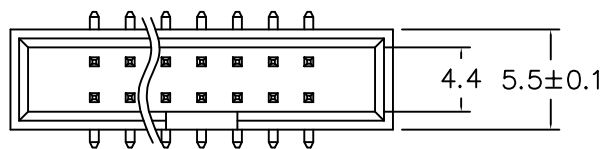


PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PA6T (UL94V-0),Black

Contacts:Brass

Plating:0.8u"Au

Electrical Charactristics:

Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Currrnt Rating:1.5 AMP

Operating Temperature:-40℃ to +105℃

Position Dimension	6 Thru 68
A± 0.30	2.00 * No. of Positions+7.34
B± 0.20	2.00 * No. of Contacts-2.00

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市百富特电子有限公司	
主体	PA6T					
端子	黄铜镀金					
公差 分段	>10 ±0.20	制图	审查	核准	品名	2.0简牛 NP
	<10 ±0.15					
	<3 ±0.05				料号	
视角		刘建				