


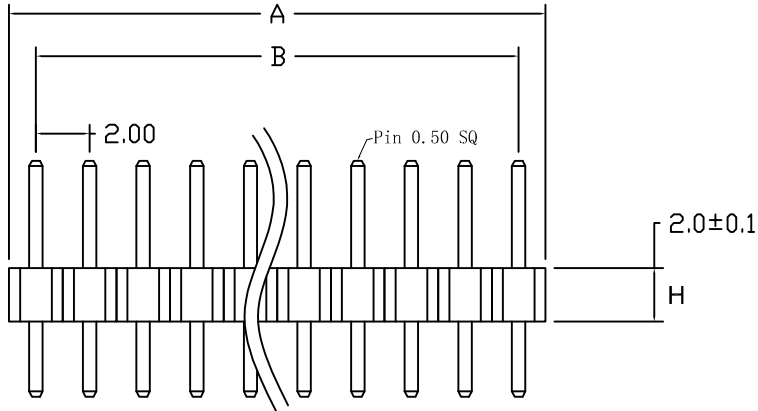


ÓÉ Foxit PDF Editor ±â¼-
PæÈÛÜÖÐ (c) by Foxit Software Company, 2004
½00ÄÖU/EA¹Ä½



PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PA6T (UL94V-0),Black

Contacts:Brass

Plating:Au or Sn over 50u'' Ni

Electrical Charactristics:

Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Currernt Rating:1.5 AMP

Operating Temperature:-40℃ to +105℃

Position Dimension	1 Thru 40
A± 0.30	2.0 * No. of Positions
B± 0.20	2.0 * No. of Contacts-2.0
H	1.0/1.5/2.0

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-04-28	深圳市百富特电子有限公司		
主体	PA6T						
端子	黄铜镀金						
公差分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	2.0*2.0mm单排针 1*nP 常规	
视角		刘建			料号		