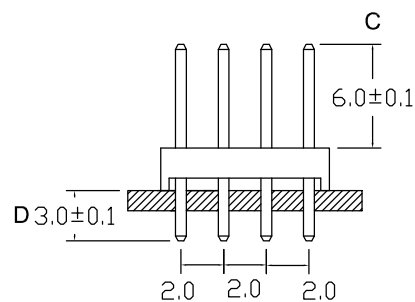
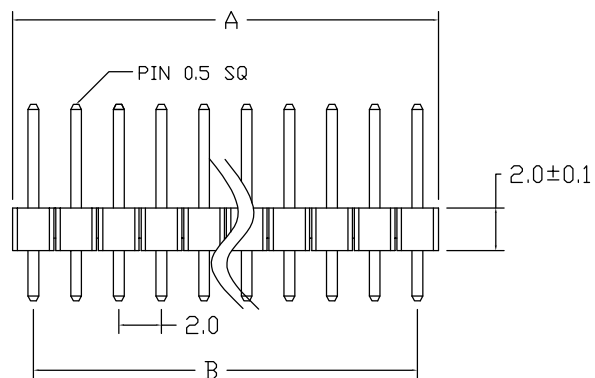
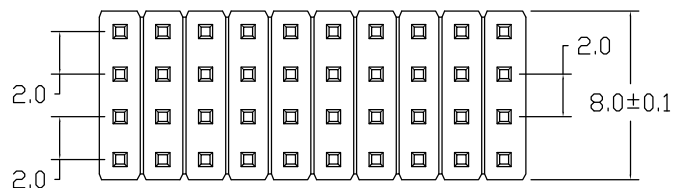


PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PBT (UL94V-0),Black

Contacts:Brass

Plating: Au or Sn over 50u'' Ni

Electrical Characteristics:

Contact Resistance: 20mΩ Max.

Insulator Resistance:1000M Ω Min.


Withstanding Voltage:AC 500V

Currrnt Rating:1.5 AMP

Operating Temperature:-40°C to +105°C

Position Dimension	1 Thru 40
A± 0.30	2.0 * No. of Positions
B± 0.20	2.0 * No. of Contacts-2.0

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-14	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金					
公差 分段	$>10 \pm 0.30$ $<10 \pm 0.20$ $<3 \pm 0.10$	制图	审查	核准	品名	2.0X2.0 4*nP 四排直针
视角		刘建			料号	