
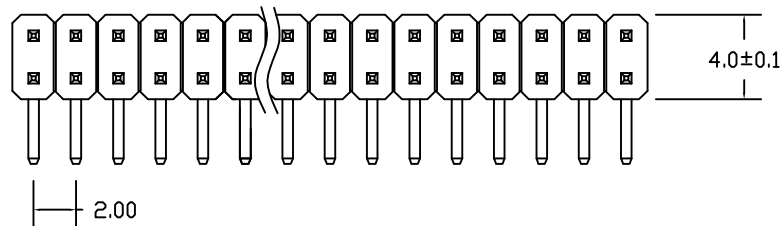


ÓÉ Foxit PDF Editor ±½/-
°æË"ËüÖÐ (c) by Foxit Software Company, 2004
½ÖÖÁÖÜ/EA¹ÀË

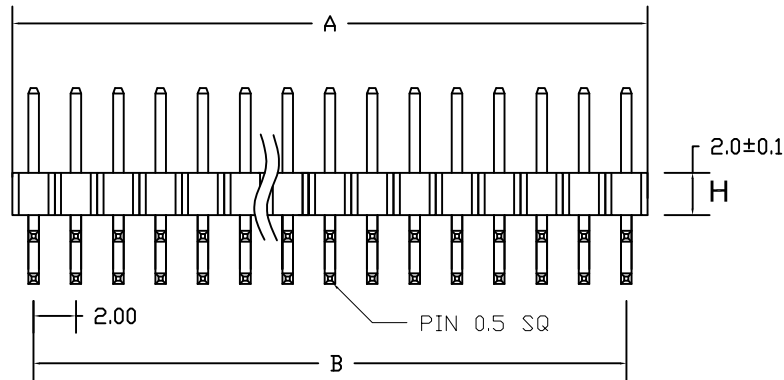

PCB LAYOUT

SPECIFICATIONS

Material:

Insulator:Glass filled PBT (UL94V-0),Black

Contacts:Brass

Plating:0.8u"Au

Electrical Characteristics:


Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Currrent Rating:1.5 AMP

Operating Temperature:-40℃ to +105℃

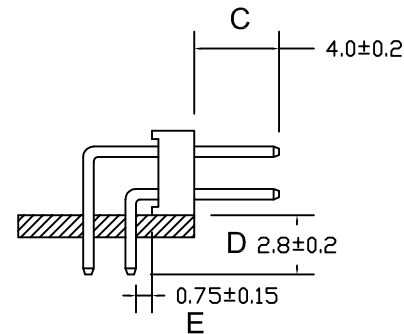

Position Dimension	1 Thru 40
A±0.30	2.0* No. of Positions
B±0.20	2.0 * No. of Contacts-2.0

未注公差按公差分段要求

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-4-26	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金					
公差 分段	>10 ±0.3 <10 ±0.2 <3 ±0.1	制图	审查	核准	品名	2.0*2.0 双排针 常规双弯 2*nP
视角	刘建				料号	