
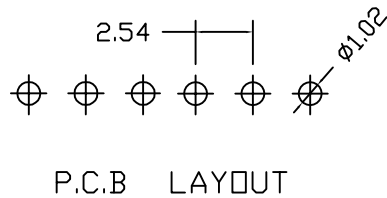
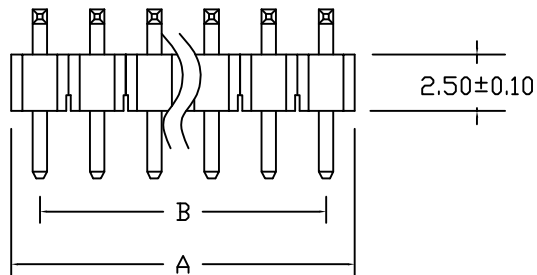


ÓÉ Foxit PDF Editor ±â¼-
pæÈ"ËüÖÐ (c) by Foxit Software Company, 2004
½00ÁÖU/EA¹Ä½

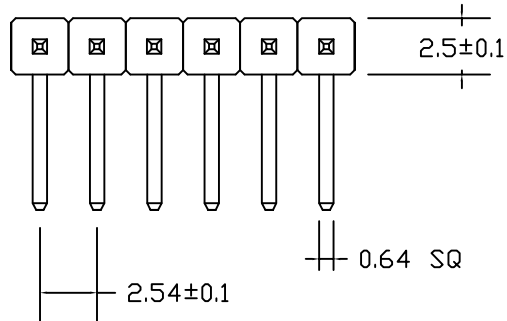

SPECIFICATIONS

Material:

Insulator:PBT (UL94V-0), Black

Contacts:Brass

Plating: Au or Sn over 50u'' Ni

Electrical Charactristics:


Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 1000V

Currernt Rating:3 AMP

Operating Temperature:-40℃ to +105℃



Position Dimension	1 thru 40
A± 0.30	2.54 * No. of Positions
B± 0.20	2.54 * No. of Contacts-2.54

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-05-03	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金					
公差 分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	2.54 (H2.50) 1*NP 90° 普弯
视角		刘建			料号	